



## General Information



The **P7** is a ultra compact, widerange loudspeaker for high quality applications. With 60W powerhandling and it's elegant design the **P7** delivers an outstanding reproduction of speech and music.

The **P7** is ideal for demanding nearfield applications such as front fill and stage monitor use, broadcast and TV monitoring, exhibition stands, boardrooms or for use under balconies and at small scale presentations.

### Features

- ▶ 3,5" woofer with 1" voice coil
- ▶ High power handling with 30W AES / 60 W Program Power
- ▶ 90° circular Dispersion
- ▶ scratch resistant paint


### Performance data

Basic layout	sealed enclosure
Frequency response (-3 dB)	92 Hz - 19 kHz
Sensitivity 1W @ 1 m	88dB (full space)
Maximum SPL	110 dB (SPL peak @ 1 m)
Horizontal coverage (-6 dB)	90°
Vertical coverage (-6 dB)	90°
Power handling	RMS 30W
	program 60W
	peak 100W
Nominal impedance	8 Ω

# Specifications

## Physical data

Enclosure	Wood with scratch resistant coating
Colour	black and white; RAL standard colours on request
Connectors	Clip Connector
Dimensions (W x H x D)	102 x 102 x 130 mm
Net weight	750 g
suspension points	2 x M8 thread
front design	metal grill, powder coated

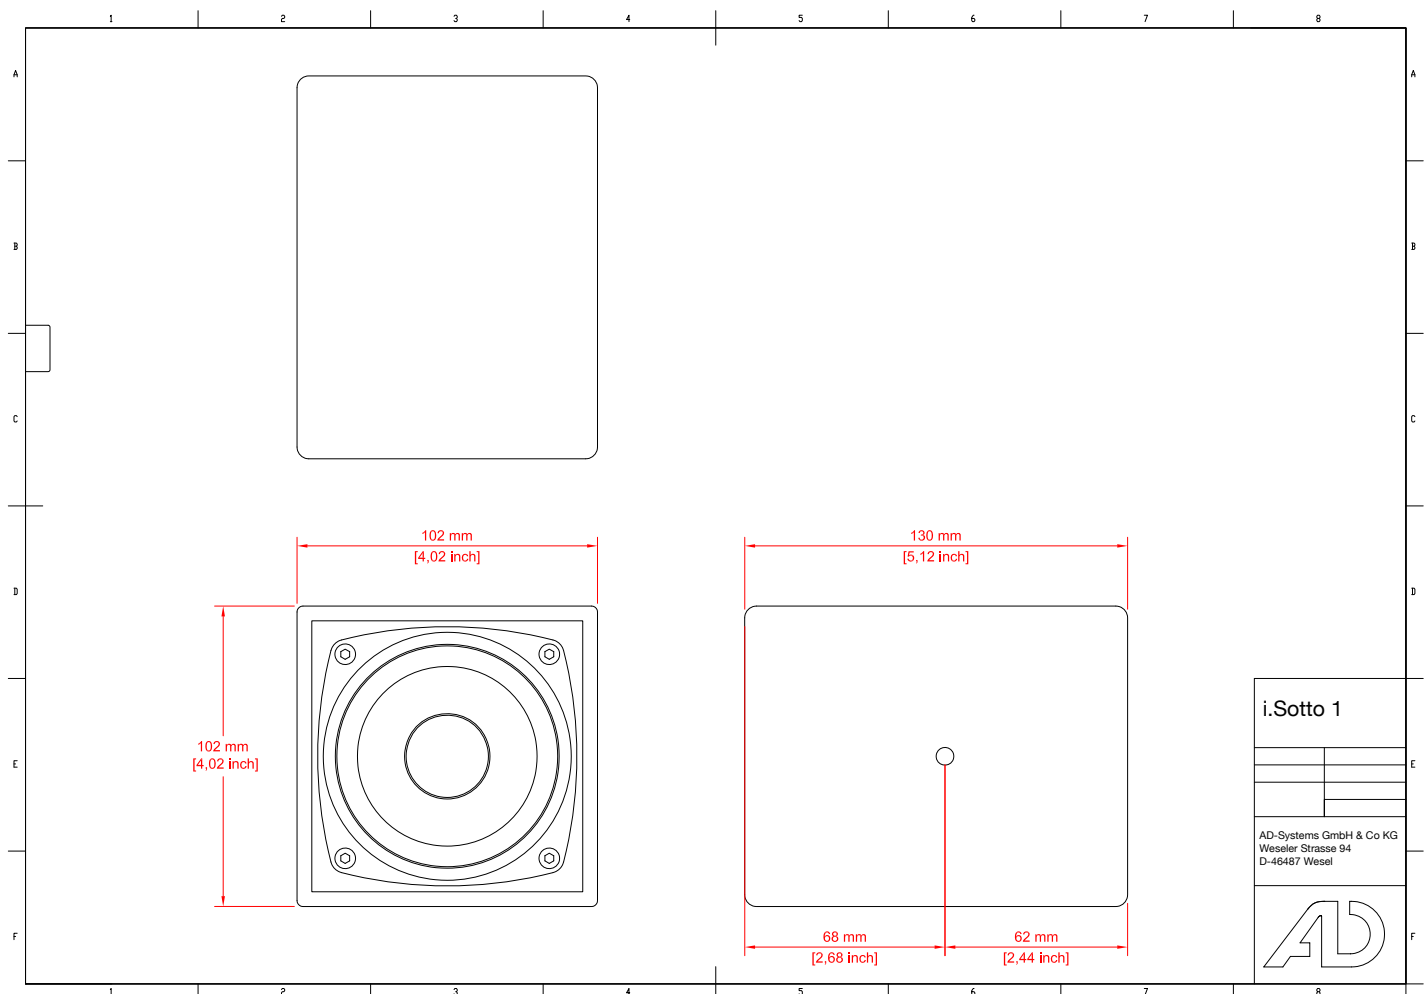



For more information please visit our website! There you will find also:

Autocad Files (DXF, DWG, PDF)

Measurement data for acoustical simulation in Ease and Ulysses

Manuals

Architectural & Engineering Specs

AD-Systems GmbH & Co KG  
Weseler Straße 94  
D-46487 Wesel

T: +49 (0) 2803 804 8350  
E: [info@ad-systems.com](mailto:info@ad-systems.com)  
W: [www.ad-systems.com](http://www.ad-systems.com)